


The ME193 is a versatile medical LCD ideal for multi-modality viewing

The ME193 is equipped to fulfill all requirements for a high-end modality display. The brightness of 1500 cd/m² enables a perfect image quality even under brighter ambient conditions. A wide range of different Gamma Presets and adjustment possibilities will deliver an accurate reproduction of the modality image.

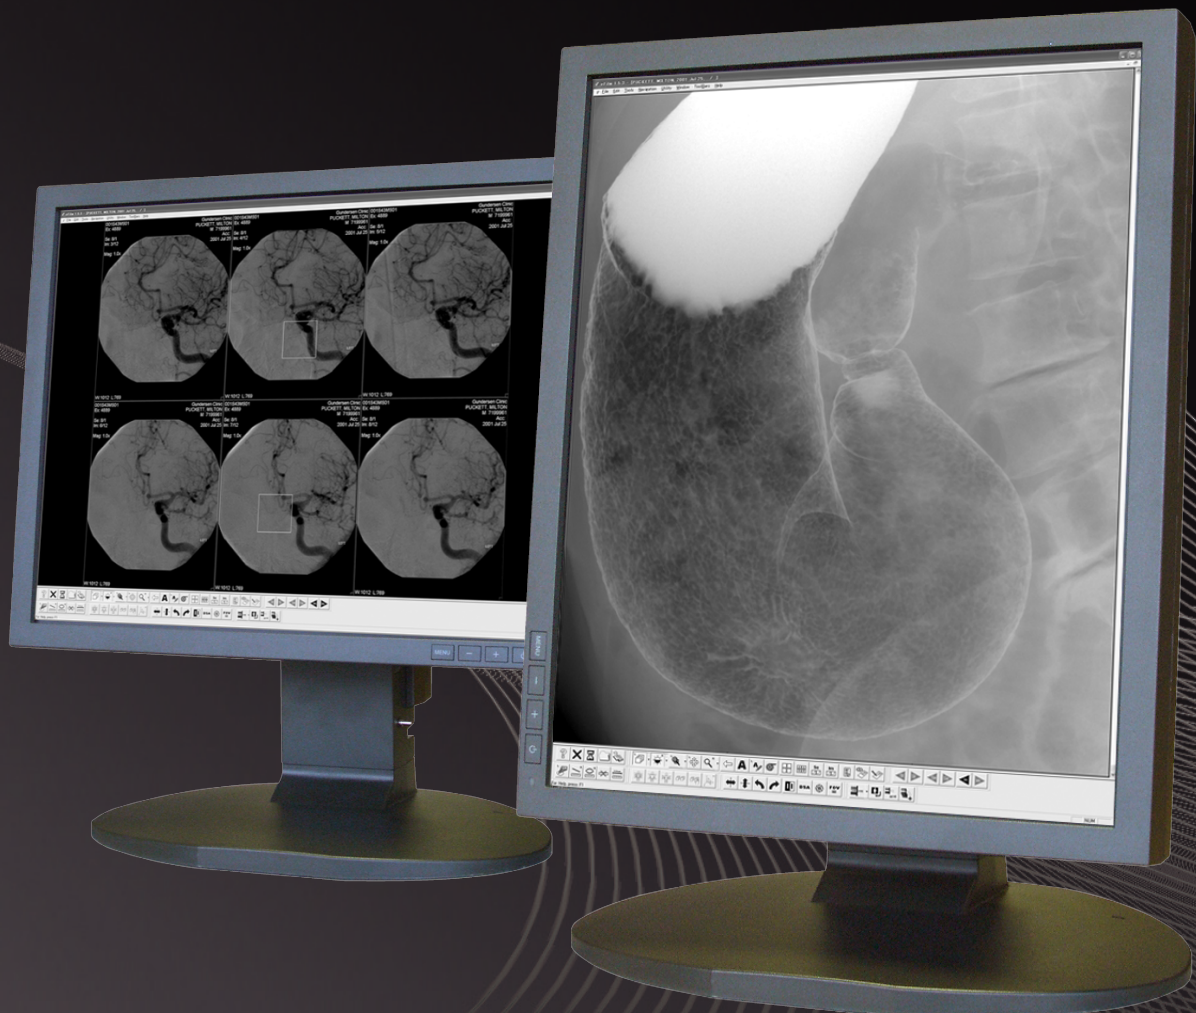

1.3 Megapixel
Monochrome Display

19"


Digital
InputHigh
Luminance
1500cd/m²Contrast
1000 : 18 Gamma
PresetsWide
Signal
RangeLED
Indicator

1.3 Megapixel Monochrome Display ME193

Features

- Multiple Interfaces
- Luminance Stabilizing System
- Gamma Calibration Function
- Built-in Power Supply Unit
- High Brightness, High Contrast and Wide Viewing
- Worldwide Medical Safety Standards

Signal Inputs:

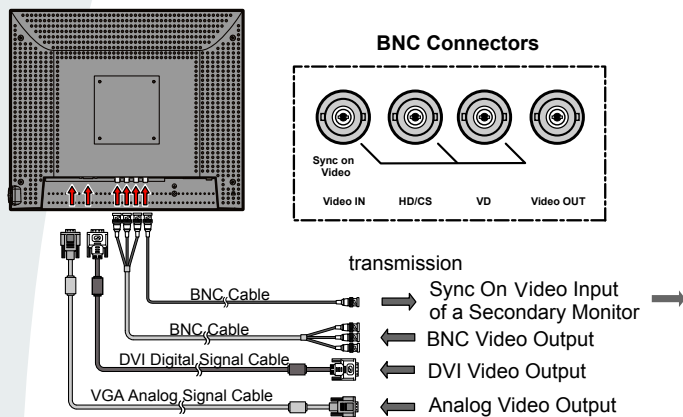

Model Name	ME193
LCD Panel	Technology: 19-inch, Dual Domain IPS Display Area: 376.32mm x 301.056mm Contrast Ratio: 1000:1 (typ.) Maximum Luminance: 1500cd/m ² (Typ.) Viewing Angle: 170° Horizontal and Vertical (typ)
Input Signals	D-sub mini 15 pin: Analog Input DVI-D 24 pin: Digital Input BNC x3: Analog Video, H-sync, V-Sync
Output Signals	BNC: Analog Video
Input Power Supply	AC100V~ 240V~ 50/60Hz
Approvals	UL60601-1, CSA C22.2 No. 601.1, MDD/CE, FCC-B, VCCI-B, CCC
User Control	Front Key SW
Base Stand	Tilt, Swivel

*Specifications and appearance are subject to change without notice.

Multiple interfaces

In addition to digital input, analog BNC input is supported. When the analog RGB signal is selected, the screen display can be adjusted by the Manual Setting function. Also, interlaced timings are supported. With the equipped buffer amplifier, a smooth display by the daisy chain connection is enabled via the BNC OUT terminal.



TOTOKU has obtained ISO14001 and ISO9001 certification which are international standards concerning environment management and quality control respectively.



Safety Precautions

Please read the user's manual for safe and proper use.

Do not expose the product to dust, moisture, steam, or oily smoke. It could cause fire, electric shock, or a failure.

TOTOKU

TOTOKU Intelligent Devices and Solutions Dept. Sales and Marketing Division.
TOTOKU ELECTRIC CO., LTD.

1-11, Shinbashi 6-Chome, Minato-ku, Tokyo, 105-0004, Japan
TEL: +81 3-5860-2132 FAX: +81 3-5860-2137

USA
401 E. Corporate Drive, Suite 100
Lewisville, TX 75057 U.S.A.
TEL: +1-469-948-4839
E-mail: info@totoku-na.com

EUROPE
Jakob-Krebs Strasse 124
47877 Willich, Germany
TEL: +49 2156-496880
E-mail: info@totoku.eu

ASIA
1-11, Shinbashi 6-Chome,
Minato-ku, Tokyo, 105-0004, Japan
TEL: +81-3-5860-2132
E-mail: info-idsc@totoku.co.jp

Additional product information is available at <http://www.totoku.com/display/>

*Microsoft and Windows are trademarks of the US Microsoft Corporation and are registered in the US and other countries. *Company names and product names are the trademarks or registered trademarks of the respective companies. *Product specifications and appearance are subject to change without notice. *Colors in photographs may differ from actual colors due to the printing process. *Images on screens are simulated.

Please contact the distributor below with inquiries and orders.